
4 3 \$\frac{1}{V} 2 1 1

NOTES:

- 1. GAS/DIESEL USE
- 2. ENVIROLASTIC 940 DTM POLYASPARTIC URETHANE COATING FOR HIGH PERFORMANCE FINISH (MEMCO GREY)
- 3. UL 142 LABELED AND LISTED
- 4. LEAD TIME IS DEPENDENT ON IMMEDIATE APPROVAL

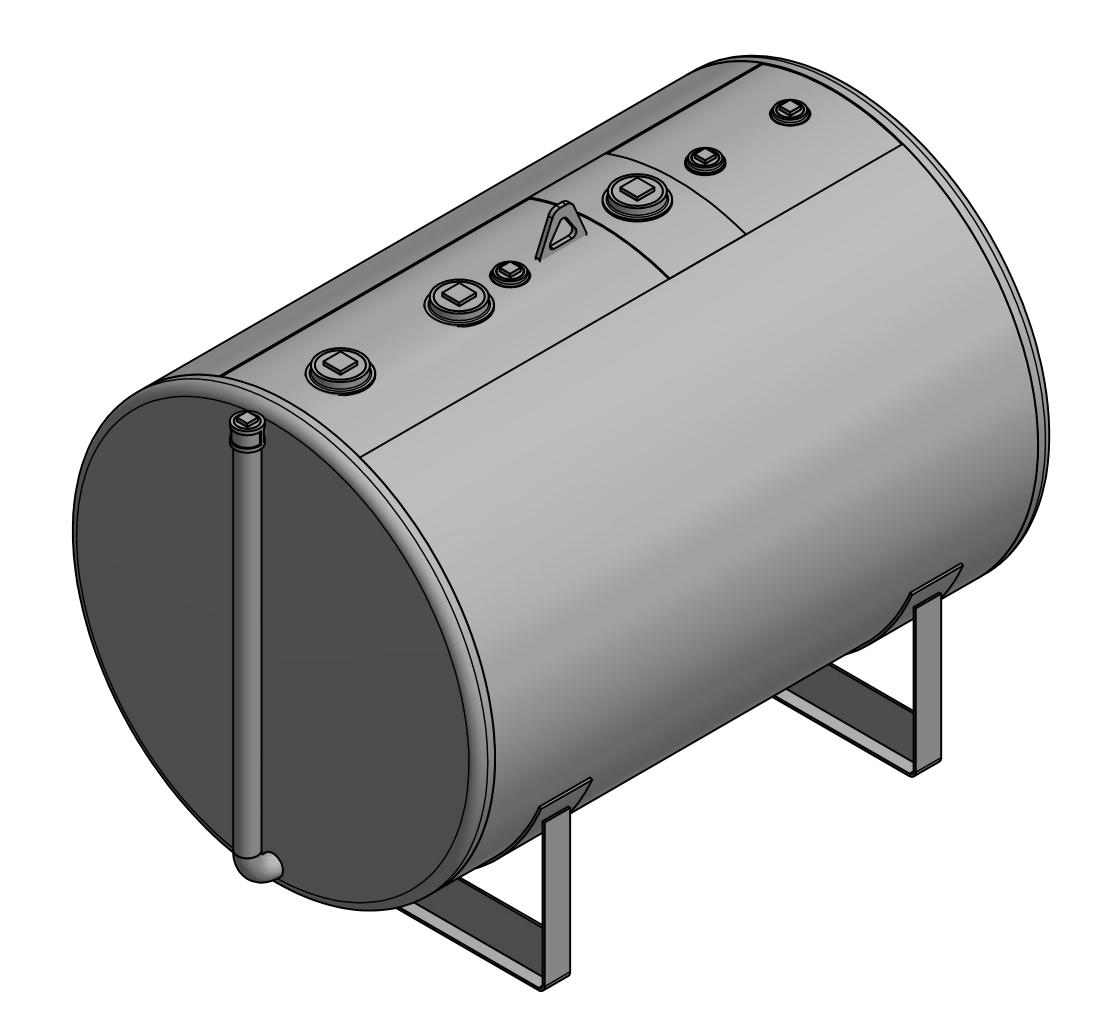

LEAD TIMES BEGIN UPON RECEIPT OF SIGNED APPROVED DRAWING, WHICH MUST BE RETURNED BEFORE PRODUCTION CAN BEGIN

#20222

STI SwRI

This document and all information and design thereon are the property of Envirosafe Fuel Systems. This document is confidential and must not be made public or copied without written authorization from Envirosafe and is subject to return upon demand. No use of this document or any design thereon is permitted except as is specifically authorized in writing by Envirosafe. Acceptance of possession of this document constitutes full agreement with the above conditions. All Rights Reserved. Memco, Inc

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE SYSTEM COMPLIANCE WITH APPLICABLE REGULATIONS.

	Γ	I I LICADLI	- REGOLATIONS.		
DRAWN BY AP MEMCO REP	5/27/2020	MEMCO, INC			
QUOTE #TANK#20222		500 GALLON UL 142 TANK (STOC			AIIZ\
					VK)
Customer Approval Signature		SIZE DWG	BOVE-GROUND FI	UGL SYSTEIIIS	REV
CUSTOMER REQUESTED COMPLETION DATE :		С	TANK#20222		
		SCALE		SHEET 1 OF 3	

1 3 **4**

