

8

7

6

5


4

3

2

1

NOTES:  
 1. GAS USE  
 2. ENVIROLASTIC 940 LV POLYASPARTIC COATING FOR HIGH PERFORMANCE  
 FINISH (WHITE)  
 3. UL 2085 LABELED AND LISTED  
 4. 2 HOUR RATING TESTED TO SwRI 97-04 NFPA 30 A FIRE RESISTANT TANK  
 5. TIE-DOWN POINTS ON SADDLES  
 6. LEAD TIME IS DEPENDENT ON IMMEDIATE APPROVAL

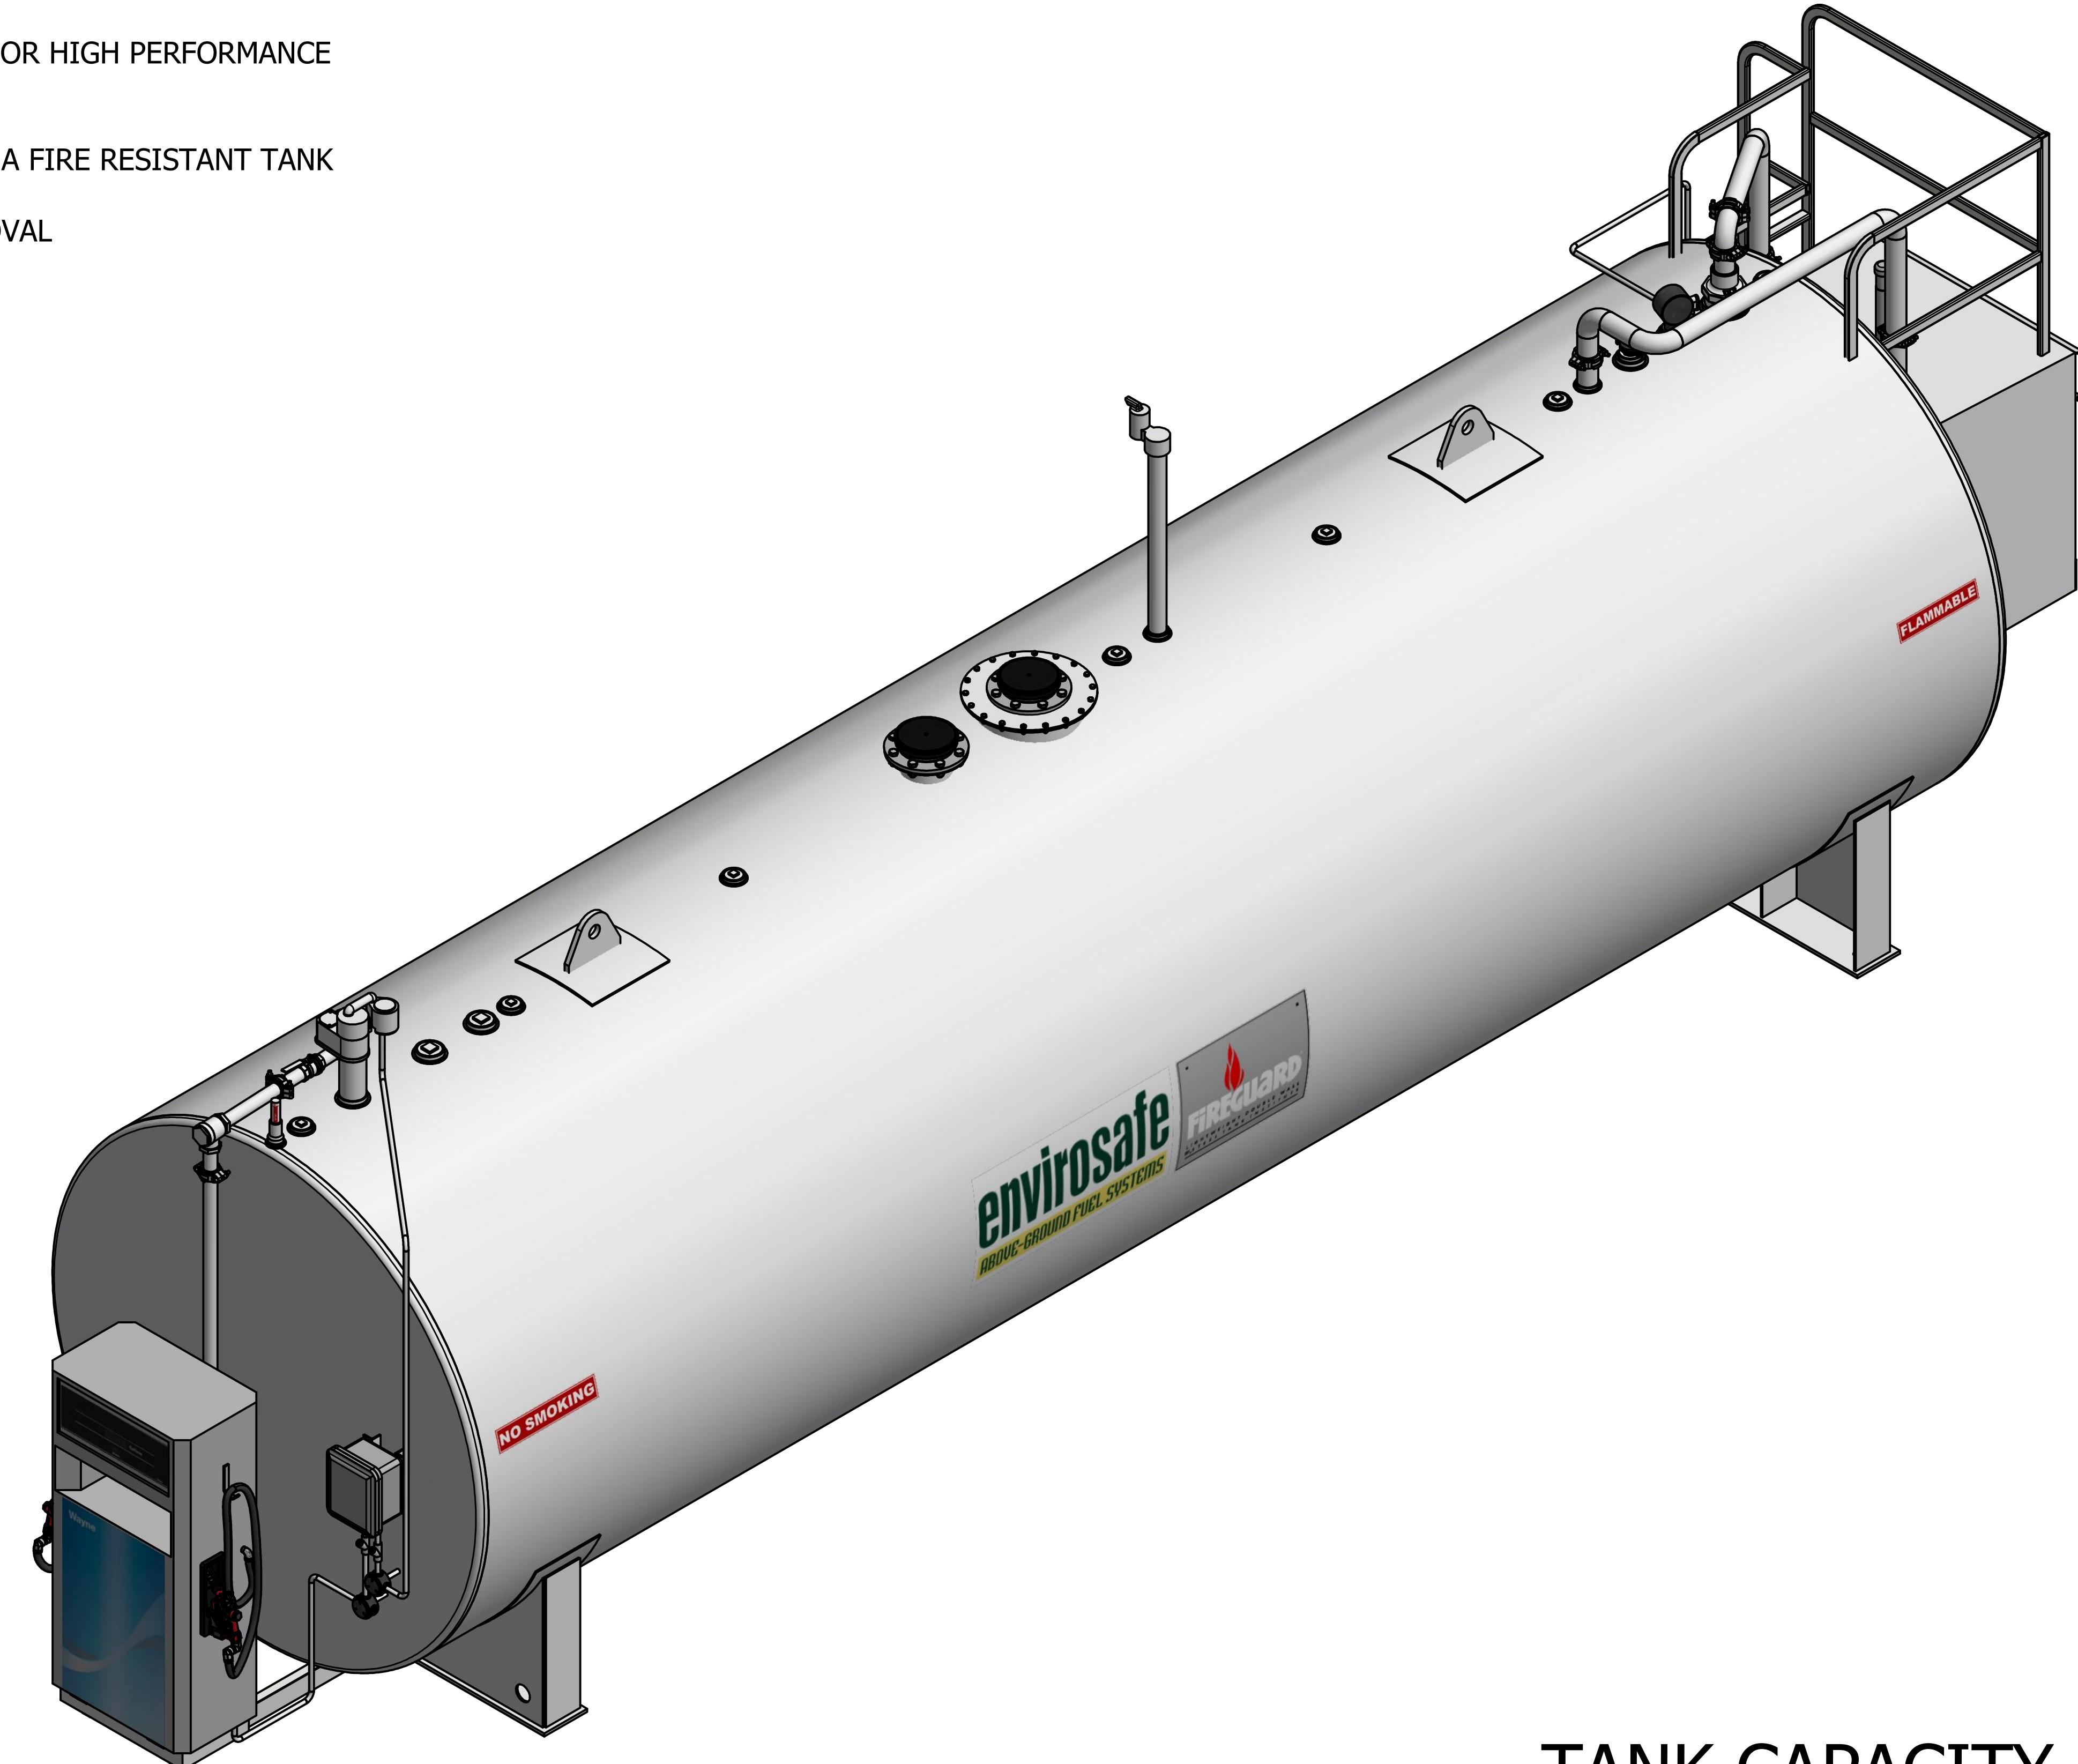

**WHITE**

CALCULATED WEIGHT:  
 32,300 LB±

**FIREGUARD**  
**TANK CAPACITY :10,000 GALLONS**

This document and all information and design thereon are the property of Envirosafe Fuel Systems. This document is confidential and must not be made public or copies without written authorization from Envirosafe and is subject to return upon demand. No use of this document or any design thereon is permitted except as is specifically authorized in writing by Envirosafe. Acceptance of possession of this document constitutes full agreement with the above conditions. All Right Reserved. Memco, Inc.

**#22052**

STI 46851 SwRI FG203541 UL D86742923

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE SYSTEM  
 COMPLIANCE WITH APPLICABLE REGULATIONS.  
 APPROVED BY:



CUSTOMER REDACTED

ER. VERSION #:6291 SALES ORDER #:00010762

AUTHOR	AP
MEMCO REP	TS
DATE	9/12/2022
SIZE	REV

**envirosafe**  
 ABOVE-GROUND FUEL SYSTEMS

ITEM QTY		DESCRIPTION		ITEM QTY		DESCRIPTION	
1	1	10,000 GALLON FIREGUARD TANK MOUNTED ON SADDLES		18	1	WAYNE DISPENSER SINGLE PRODUCT CONTAINMENT PAN	
2	1	18" MANWAY FOR EASY INNER TANK ACCESSIBILITY WITH 8" FLANGED E-VENT OPENING		19	1	ENCLOSURE ADALET HAZ LOC TYPE 4/7/9 8"X10"X6" W/ PAN & HINGES W/ 3- 1/2" NPT CONDUIT AND BOX SINGLE PHASE CONTROL W/SWITCH AND LOCKOUT 120V COIL	
3	1	6" NPT THREADED FLANGE		20	1	FE PETRO 3/4 HP w/ 9" RISER, 88" - 149" (240V 1 PH)	
4	5	4" NPT THREADED FLANGE		21	1	VALVE EMERGENCY SHUT-OFF UNION OUTLET 2"X1.5" UNIBODY STYLE	
5	7	3" NPT THREADED FLANGE (CONCRETE PORT)		22	1	2" NPT ANTI-SIPHON VALVE 5'-10' W.C.	
6	2	2" NPT THREADED FLANGE		23	1	INTERSTITIAL LEAK GAUGE	
7	1	8" 8 OZ./SQ.IN. FLANGED EMERGENCY VENT KIT		24	1	VALVE BALL FULL FLOW BRASS 2"	
8	2	LIFTING LUG WITH REPAD PLATE		25	2	1/2" JUNCTION BOX	
9	2	3" NPT THREADED FLANGE		26	2	CONDUIT SEAL OFF 1/2" FEMALE TO FEMALE	
10	1	8" 8 OZ./SQ.IN. FLANGED EMERGENCY VENT WITH SET OF NUTS AND BOLTS AND GASKET		27	1	VENT PRESSURE VACUUM 3" 6OZ./SQ.IN. ALUMINUM INTERNALS	
11	1	WELDED UL LISTED LOCKABLE 3'6"x4'2"x4' FILL BOX, CROSS BROKEN FOR EASY DRAINAGE, 2" STACK VENT AND 1/2" BALL VALVE		28	1	WAYNE DISPENSER TWIN, TWO-PRODUCT, REMOTE DISPENSER, ISLAND ORIENTED	
12	1	3" OVERFILL PREVENTION VALVE WITH TEST MECHANISM AND DIFFUSER		29	2	NOZZLE GAS 3/4" WITH 3/4"X25' HOSE PUMPFLEX II, 3/4" X 12" HOSE WHIP, 3/4" SWIVEL AND 3/4" BREAKAWAY	
13	1	3" GROUND LEVEL FILL WITH DUST CAP AND ADAPTOR		30	1	ROM DOOR TO BE USED ON 48" WIDE BOX	
14	1	918 CLOCK GAUGE WITH ALARM BOX & STANDARD FLOAT		31	1	TANK DECAL KIT (NOT SHOWN)	
15	1	MONITORING CAP 2"		32	1	TOUCH UP PAINT (NOT SHOWN AND SHIPPED SEPARATELY)	
16	1	ADAPTOR VAPOR RECOVERY 4"X3" WITH CAP VAPOR RECOVERY 4"					
17	1	STEP LADDER WITH HANDRAIL SYSTEM AND SAFETY SHIELD					

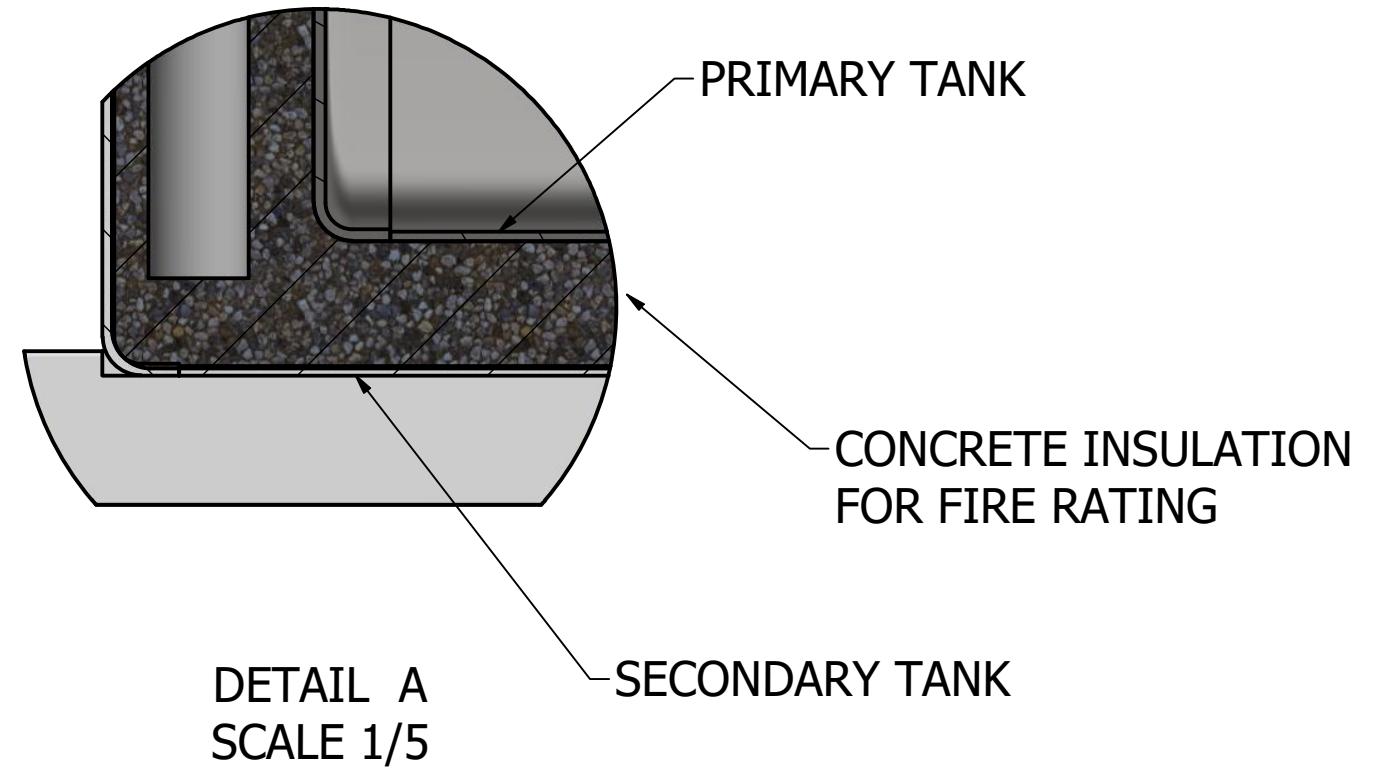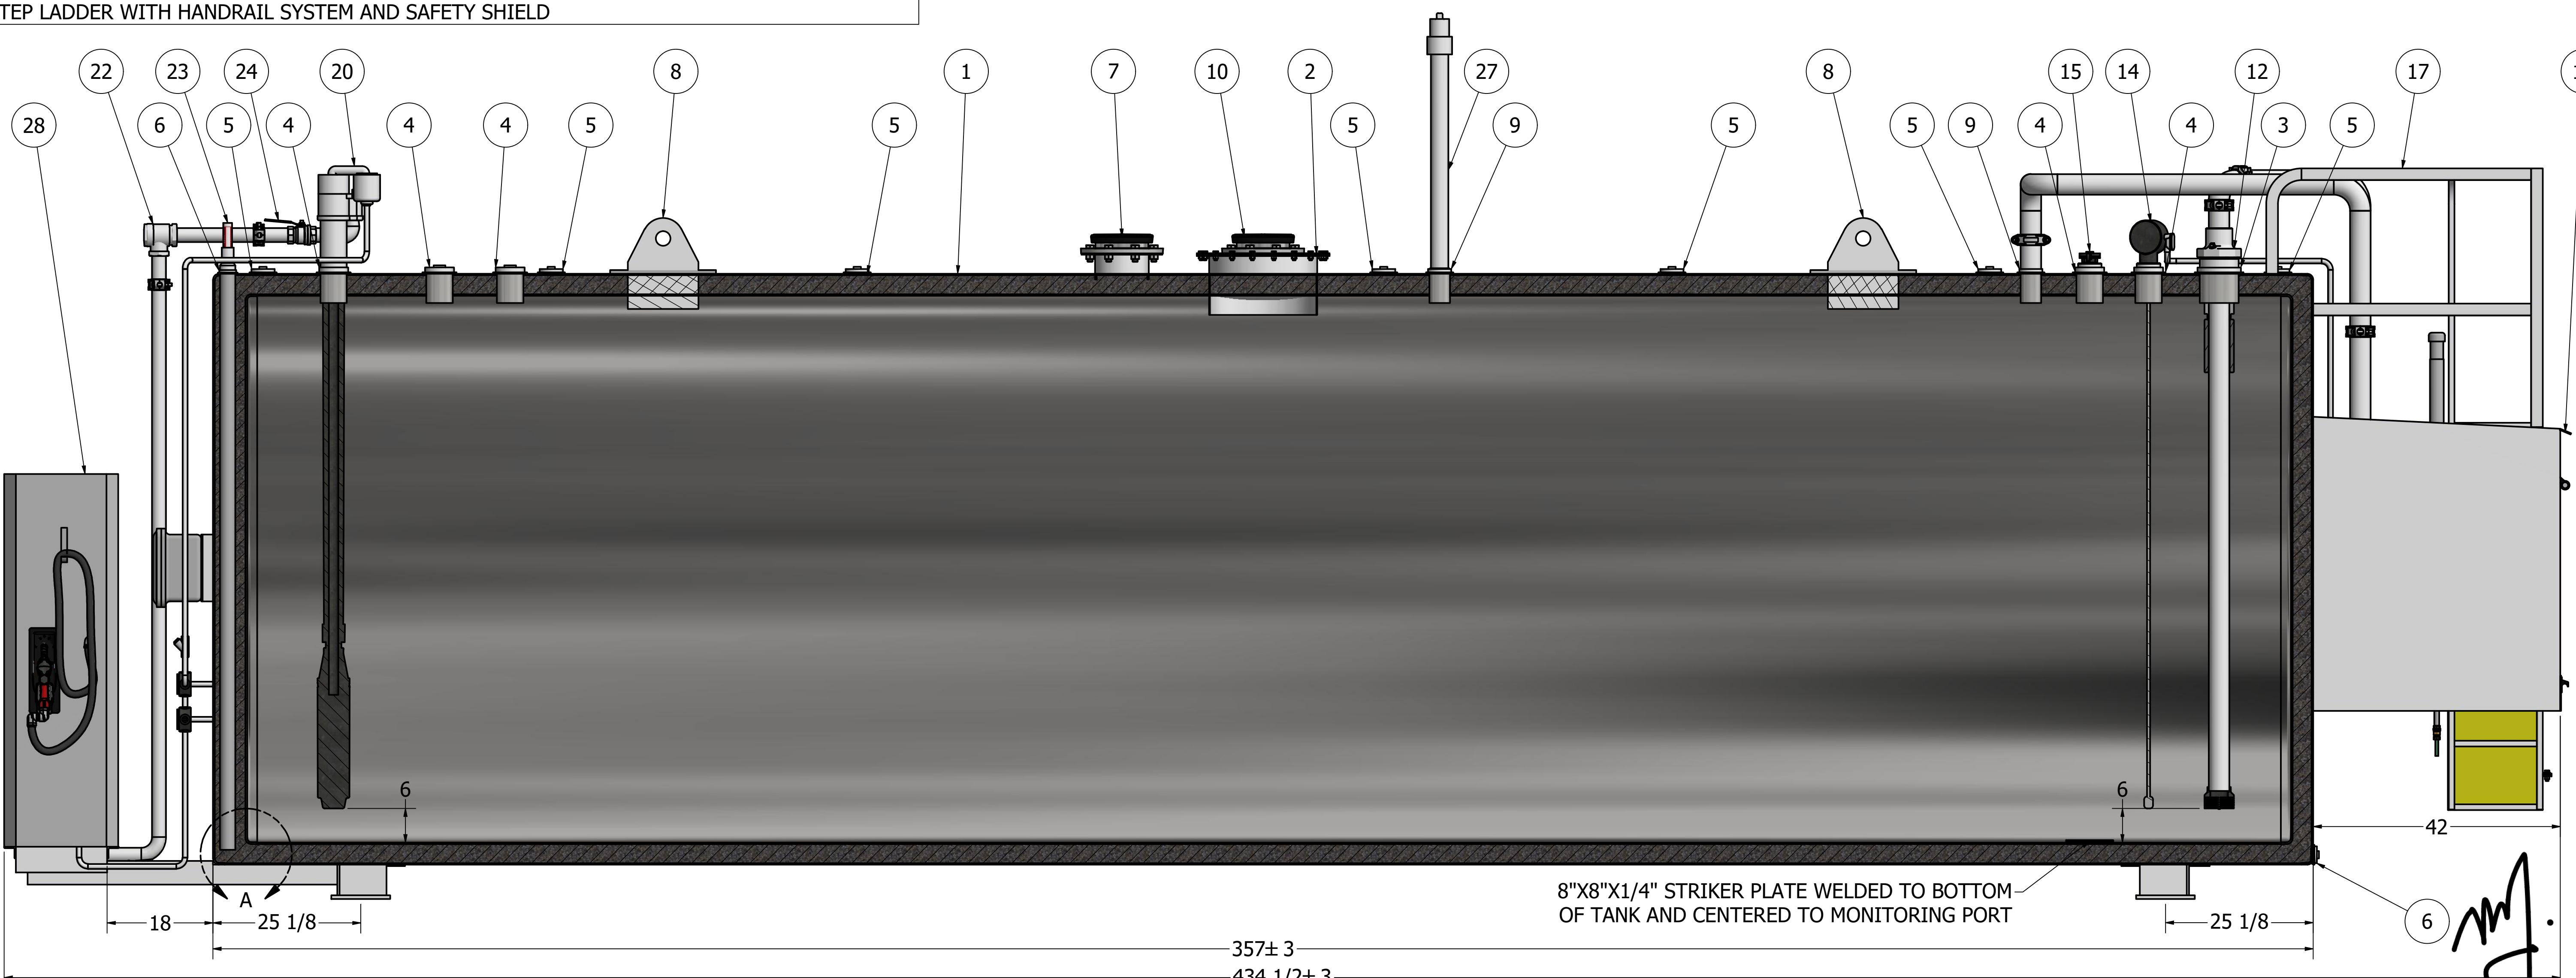

This document and all information and design thereon are the property of Envirosafe Fuel Systems. This document is confidential and must not be made public or copies without written authorization from Envirosafe and is subject to return upon demand. No use of this document or any design thereon is permitted except as is specifically authorized in writing by Envirosafe. Acceptance of possession of this document constitutes full agreement with the above conditions. All Right Reserved. Memco, Inc.

**#22052**

IT IS THE CLIENT'S RESPONSIBILITY TO ENSURE SYSTEM COMPLIANCE WITH APPLICABLE REGULATIONS.  
APPROVED BY:

STI 46851 SwRI FG203541 UL D86742923

**CUSTOMER REDACTED**

ER. VERSION #:6291 SALES ORDER #:00010762

AUTHOR AP  
MEMCO REP TS  
DATE 9/12/2022  
SIZE D REV 2 OF 6 SHEET 2 OF 6

**envirosafe**  
ABOVE-GROUND FUEL SYSTEMS

